THREAD CLIPS by WISS® for SPEED CUTTING AND TRIMMING

Ideal For: Clipping threads and strings—cutting ribbon, film, electronic filament wire and all light materials

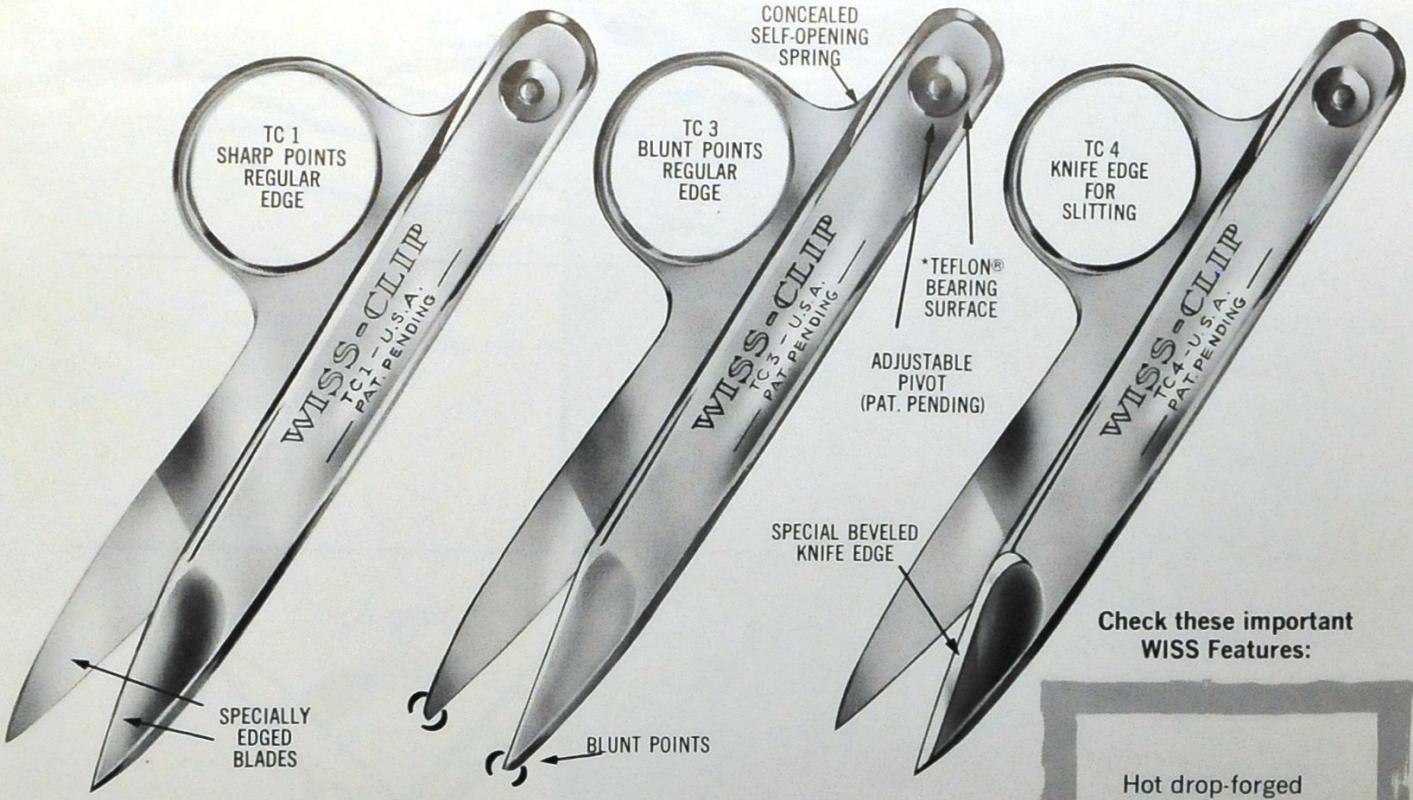

WISS THREAD CLIPS are engineered for the fast, clean snipping necessary for professional dressmaking or high speed production work. They're comfortable too. WISS THREAD CLIPS fit snugly in the palm of the hand providing maximum flexibility.

WISS Thread Clips are available with sharp points, blunt points and a special knife edge... Plus two different finishes, fully nickel plated and satin chrome plated. You should be using WISS Thread Clips because they're perfect for clipping threads and strings – cutting ribbon, film, electronic filament wire and all light materials.

Model	Finish	Overall Length	Length of Cut	Suggested Retail Price	Standard Pack	Shipping Weights
TC1	Regular edge Sharp points Nickel Plated	4⅝"	1"	$3.50	6 pair	1 lb.
TC2	Regular edge Sharp points Satin Chrome Plated	4⅝"	1"	$3.75	6 pair	1 lb.
TC3	Regular edge Blunt points Satin Chrome Plated	4⅝"	1"	$3.75	6 pair	1 lb.
TC4	Special knife edge Sharp points Nickel Plated	4⅝"	1"	$3.50	6 pair	1 lb.
TC5	Regular edge Blunt points Nickel Plated	4⅝"	1"	$3.50	6 pair	1 lb.

Check these important WISS Features:

Hot drop-forged fine cutlery steel blades for sharper and longer cutting life.

Bearing surface of super smooth *Teflon for easy, quick cutting.

Positive action, self-opening spring.

All parts replaceable Easily disassembled for re-sharpening.

*TEFLON IS A REGISTERED TRADE-MARK OF DuPONT

SEE REVERSE SIDE FOR EASY TO FOLLOW INSTRUCTIONS →

WISS®

THREAD CLIPS

HOW TO RESHARPEN

WISS Thread Clips may be resharpened when necessary as follows:

1. Loosen screw (A) one full turn to left.

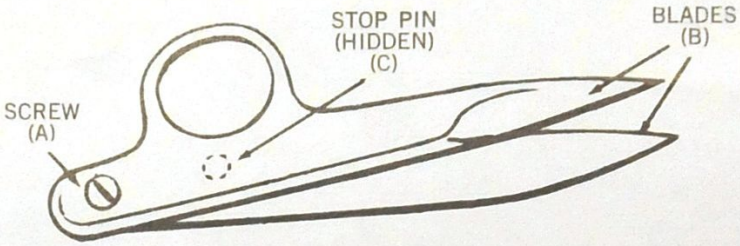

2. Hold blades (B) lengthwise with thumbs near points and spread blades apart ← → and open up thread clip.

3. In this open position the blades can easily be re-edged.

   For most satisfactory results use wheel of about 80 grit. Follow existing angle of approximately 25 degrees. Be careful not to press too hard or burn the blades.

4. After re-edging, close the blades.

5. Reset screw to desired tension.

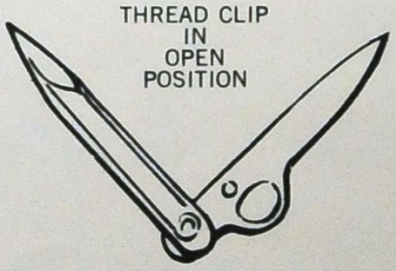

NOTE
After repeated re-edging, the points may not overlap perfectly in the closed position. To correct — grind or file stop pin (C) until points meet satisfactorily.

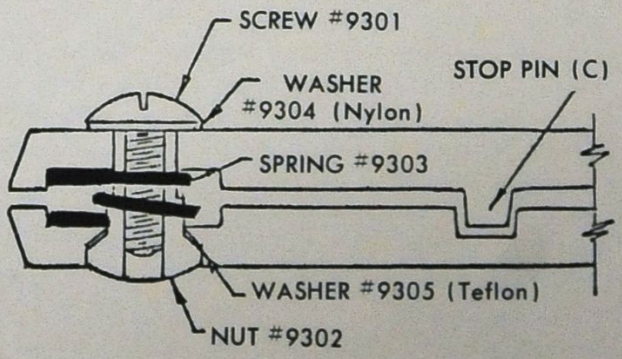

THREAD CLIPS REPLACEMENT PARTS KIT

Order No. TCRK

WISS KIT NO. TCRK CONTAINS ONE EACH OF THE FOLLOWING:

NO. 9301 — SCREW
NO. 9302 — NUT
NO. 9303 — SPRING
NO. 9304 — NYLON WASHER
NO. 9305 — TEFLON WASHER

STANDARD PACK — 10 KITS TO CARTON
SUGGESTED RETAIL PRICE PER KIT . . . . . $.50
AVAILABLE THROUGH YOUR SUPPLIER

DSI

A-214 • 4-66

Printed in U.S.A.

J. WISS & SONS CO. 33 Littleton Avenue, Newark, N.J. 07107, U.S.A.